


Medium pressure / Thermoplastic hose Hydraulic - Paint Spray

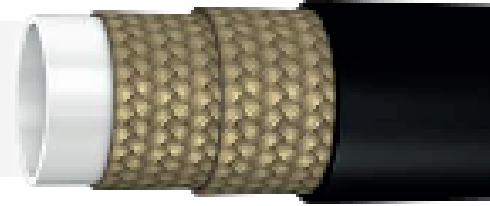

VINCKE TH-88

PAINT-OIL 2W PAINT-OIL 2W										
Code	Nominal \emptyset	Inside \emptyset	Outside \emptyset	Max. Working Pressure	Burst Pressure	Minimum Bend Radius	Weight			
Dash Size	inch	mm	mm	bar	psi	bar	psi	mm	g/m	
8804	04	1/4"	6,6	13,5	450	6525	1800	26100	100	336
8805	05	5/16"	8,18	15,1	400	5800	1600	23200	110	388
8806	06	3/8"	9,65	17	380	5510	1520	22040	127	483
8808	08	1/2"	12,7	22	300	4350	1200	17400	178	605
8810	10	5/8"	16	24,5	210	3045	840	12180	203	803
8812	12	3/4"	19	27,5	160	2320	640	9280	250	922
8816	16	1"	25,5	35	150	2175	600	8700	305	1092

Construction:

Internal core Polyamide single

Reinforcement One or two braids of polyester fiber.

Temperature not to exceed +70°C for air and water based fluids.

Cover Polyurethane

Temperature Range: Continuous: -40°C to +100°C

Note: Available micro perforated and special colours available on request.

